

Aluminium strip

Specification:

BS 2898 and customer specification.

Application:

Transformer and armature winding, aviation and building industries.

Construction:

Bare flat aluminium strip, annealed.

Size range:



Smallest sizes 3.30mm (w) x 1.90mm (th) to Largest sizes 19.00mm (w) x 3.00mm (th).

Packaging:

Coils (minimum 5kg).

Aluminium properties:

Tensile strength max.	Mpa	95
-----------------------	-----	----

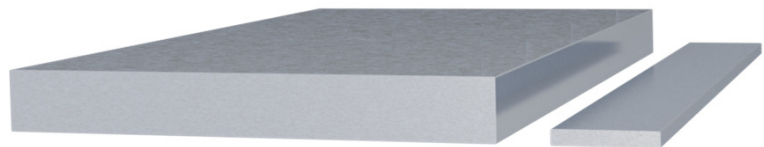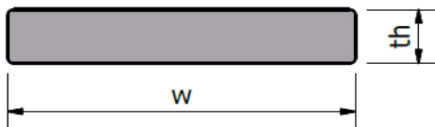

Revision: R00 12/04/2016

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of M-TEC. The information is believed to be correct at the time of issue to the best of M-TEC's knowledge. M-TEC reserves the right to amend this specification without prior notification. This specification is not contractually valid unless specifically authorised by M-TEC. M-TEC shall not be liable for any damages whatsoever (including indirect, incidental, special, punitive or consequential damages and loss of profits, opportunities or information) arising from or result from the use of or reliance on information contained in this document, and/or any inaccuracy or omission in such information contained in this document.